


SeqTrak

MIDI Commander Template Guide

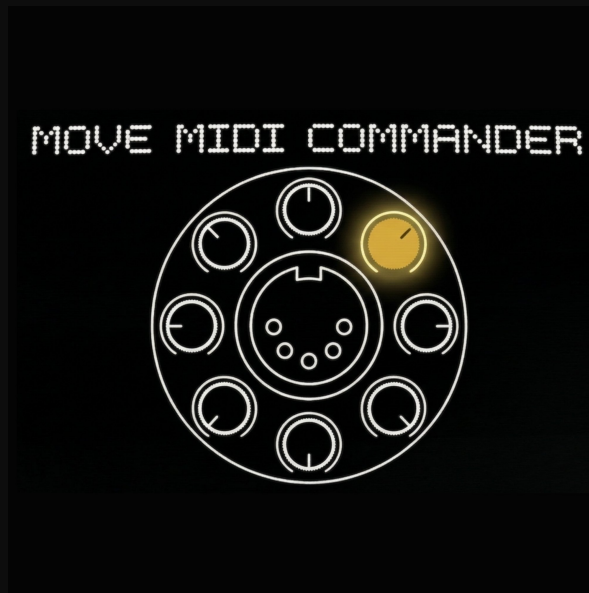

FOR ABLETON MOVE

Yamaha SeqTrak — 11 tracks + Master FX + Mixer + Macros. Pages 1-11: one per track.
Page 12: Master FX (Ch 1). Pages 13-16: Mixer/Macros (multi-channel, customize per-encoder on device).

Default MIDI channel: 1.

Device parameters at load

Param	Value
root_note	C
scale	chromatic
layout	fourths
pad_mode	chromatic
drum_base	36
pad_color	orange
velocity_curve	fixed

Pages overview

Page	Label	Channel
1	Kick	1
2	Snare	2
3	Clap	3
4	Hat 1	4
5	Hat 2	5
6	Perc 1	6
7	Perc 2	7
8	Synth 1	8
9	Synth 2	9
10	DX/FM	10
11	Sampler	11
12	Master FX	1
13	Mix View A	1
14	Mix View B	9
15	Macro Scene A	8
16	Macro Scene B	1

Page details

Page 1 — Kick

Channel 1.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 2 — Snare

Channel 2.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 3 — Clap

Channel 3.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	

Encoder	Label	Full Name	Output	Notes
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 4 – Hat 1

Channel 4.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 5 – Hat 2

Channel 5.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	

Encoder	Label	Full Name	Output	Notes
8	Dly	Dly Send	CC 94	

Page 6 — Perc 1

Channel 6.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 7 — Perc 2

Channel 7.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Pit	Pitch	CC 25	
4	Cut	Cutoff	CC 74	
5	Res	Reso	CC 71	
6	Dcy	Decay	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 8 — Synth 1

Channel 8.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	

Encoder	Label	Full Name	Output	Notes
2	Cut	Cutoff	CC 74	
3	Res	Reso	CC 71	
4	Atk	Attack	CC 73	
5	D/R	Dcy/Rel	CC 75	
6	Arp	Arp Type	CC 27	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 9 – Synth 2

Channel 9.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Cut	Cutoff	CC 74	
3	Res	Reso	CC 71	
4	Atk	Attack	CC 73	
5	D/R	Dcy/Rel	CC 75	
6	Arp	Arp Type	CC 27	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 10 – DX/FM

Channel 10.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Cut	Cutoff	CC 74	
3	Alg	FM Algo	CC 116	
4	Mod	FM ModAm	CC 117	
5	MFr	FM MdFrq	CC 118	
6	Fbk	FM Fdbk	CC 119	
7	Rvb	Rvb Send	CC 91	

Encoder	Label	Full Name	Output	Notes
8	Dly	Dly Send	CC 94	

Page 11 – Sampler

Channel 11.

Encoder	Label	Full Name	Output	Notes
1	Vol	Volume	CC 7	
2	Pan	Pan	CC 10	
3	Cut	Cutoff	CC 74	
4	Res	Reso	CC 71	
5	Atk	Attack	CC 73	
6	D/R	Dcy/Rel	CC 75	
7	Rvb	Rvb Send	CC 91	
8	Dly	Dly Send	CC 94	

Page 12 – Master FX

Channel 1.

Encoder	Label	Full Name	Output	Notes
1	MF1	MstrFX1P	CC 102	
2	MF2	MstrFX1Q	CC 103	
3	MF3	MstrFX1R	CC 104	
4	MX2	MstrFX2	CC 105	
5	MX3	MstrFX3	CC 106	
6	SRv	Snd RvbP	CC 110	
7	SDI	Snd DlyP	CC 113	
8	Sol	GlbSolo	CC 24	

Page 13 – Mix View A

Channel 1.

Encoder	Label	Full Name	Output	Notes
1	KVI	Kick Vol	CC 7	default 127

Encoder	Label	Full Name	Output	Notes
2	SVI	SnarVol	CC 7	default 127
3	CVI	ClapVol	CC 7	default 127
4	H1V	Hat1Vol	CC 7	default 127
5	H2V	Hat2Vol	CC 7	default 127
6	P1V	Prc1Vol	CC 7	default 127
7	P2V	Prc2Vol	CC 7	default 127
8	S1V	Syn1Vol	CC 7	default 127

Page 14 – Mix View B

Channel 9.

Encoder	Label	Full Name	Output	Notes
1	S2V	Syn2Vol	CC 7	default 127
2	DXV	DX Vol	CC 7	default 127
3	SmV	SmplVol	CC 7	default 127
4	MX2	MstrFX2	CC 105	
5	MX3	MstrFX3	CC 106	
6	Rv2	RvbSndP	CC 111	
7	DI2	DlySndP	CC 114	
8	Sol	GlbSolo	CC 24	

Page 15 – Macro Scene A

Channel 8.

Encoder	Label	Full Name	Output	Notes
1	S1C	Syn1Cut	CC 74	
2	S2C	Syn2Cut	CC 74	
3	DXC	DX Cut	CC 74	
4	KRv	KickRvb	CC 91	
5	SRv	Syn1Rvb	CC 91	
6	MF1	MstrFX1	CC 102	
7	MX2	MstrFX2	CC 105	

Encoder	Label	Full Name	Output	Notes
8	MX3	MstrFX3	CC 106	

Page 16 — Macro Scene B

Channel 1.

Encoder	Label	Full Name	Output	Notes
1	KPt	KickPit	CC 25	
2	SPt	SnarPit	CC 25	
3	HPt	Hat1Pit	CC 25	
4	1AS	S1ArpSp	CC 29	
5	2AS	S2ArpSp	CC 29	
6	DAS	DXArpSp	CC 29	
7	SPr	S1Porta	CC 5	
8	DFb	DX FMFb	CC 119	

Generated from `presets/library/yamaha-seqtrak.json`. Regenerate via `python3 tools/generate_template_docs.py`.